

USING THE USER WEB PORTAL


Each extension of your Cloud PBX system has access to a powerful web portal for managing voicemail, call routing, and more.

- [Accessing the Portal](#)
- [Desktop Call Control](#)
- [Home](#)
- [Voicemail](#)
- [Time Frames](#)
- [Answering Rules](#)
- [Updating Phone Buttons \(Speed Dials & BLF\)](#)

Accessing the Portal

To access the web portal

1. Start a web browser.
2. Go to <https://pbx.precision-computer.com>
3. At the login page:
 - Enter your Login Name (ext@customerpbxname) and Password. If you do not know your Login Name or Password use the applicable Forgot Link.
 - If you never received these details use the New User link

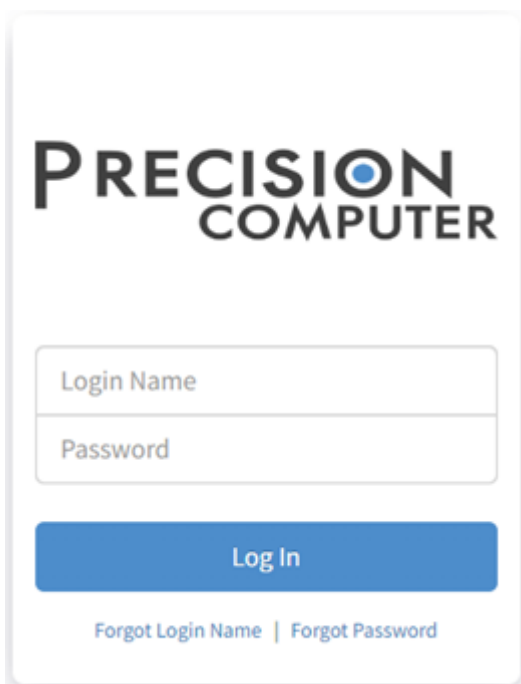

The image shows a login form for Precision Computer. At the top, the logo "PRECISION COMPUTER" is displayed in a bold, sans-serif font. Below the logo are two input fields: "Login Name" and "Password". A blue "Log In" button is positioned below the password field. At the bottom of the form, there are two links: "Forgot Login Name" and "Forgot Password", separated by a vertical bar.

Desktop Call Control

Desktop call controls appear when making or receiving a call. These controls allow you to see who is calling and manage a current call.

Incoming Calls

Incoming calls appear in a window in the portal. This window shows the caller ID name and number, along with Reject and Answer buttons.


- Selecting Reject sends the call to voicemail if available. The Answer button may not be available, depending upon your handset model.



Example of an Incoming Call

Active Calls

An active call window that displays the caller ID and call time. The three controls at the bottom of the window let you hold, hang up, or transfer the call. If you select transfer, a field appears for entering the extension of the recipient. If you prefix the recipient's extension number with 03, the call goes straight to voicemail.



Home

The Home page of your portal provides an at-a-glance view of everything going on with your extension. Table 2 1 describes the areas on the Home page.



Home

NEW MESSAGES »			
From		Date	Duration
(206) 555-8555	HERTZ_NEIR_THIRD	Today, 10:38am	0:36
(206) 555-5597	WVA STATE CRIS S	Apr 4th, 10:19am	0:34

RECENT CALL HISTORY »			
Number	Name	Date	Duration
(206) 555-8555		Today, 10:41am	1:22
(206) 555-1389	EMMENPORT NEIR	Today, 10:38am	0:04
(206) 555-8555	HERTZ_NEIR_THIRD	Today, 10:36am	2:24

STATUS MESSAGE	
Enter a new status message...	

ACTIVE ANSWERING RULE »	
Open Hours	
Simultaneously ring:	
<ul style="list-style-type: none"> • x5702 • x5702a • x5702c • x5702b • x5702d • x5702e 	

ACTIVE PHONES »	
5702e	Panasonic_KX-TGP500B0...
5702c	Polycom 335-UA/3.3.4....
5702	PolycomVVX-VVX_400-UA...

Figure 2 3. Example of Home Page

Table 2 1. Fields in the Home Page

Field	Description
New Messages	Shows new messages. You can play messages, click to call back, download, save, and delete. To see all the controls, hover over the message.
Recent Call History	Color-coded icons show your recent calls. <ul style="list-style-type: none"> • Green icon = outbound call. • Red icon = missed inbound calls. • Blue icon = inbound received calls. To call back a number, click the phone number.
Status Message	Allows you to enter a status message that appears to other users of the portal.


Active Answering Rule	Your extension can have multiple answering rules. For example, you might ring your phone in one mode or forward to your cell in another mode. In this field, you can which answering rule is the active rule.
Active Phones	Your extension may have multiple phones (for example, one in the office and one at home). This field shows which handsets are currently online.

Voicemail

You configure voicemail using the Messages page. This page has two tabs for handling voicemail:


- Messages — see “Messages” below.
- Settings — see “Voicemail Settings” on the next page.

To display the Messages page, click the Messages icon at the top of the page:




Messages

The Messages tab allows you to manage your new, saved, and deleted voicemail, as well as greetings and other settings.

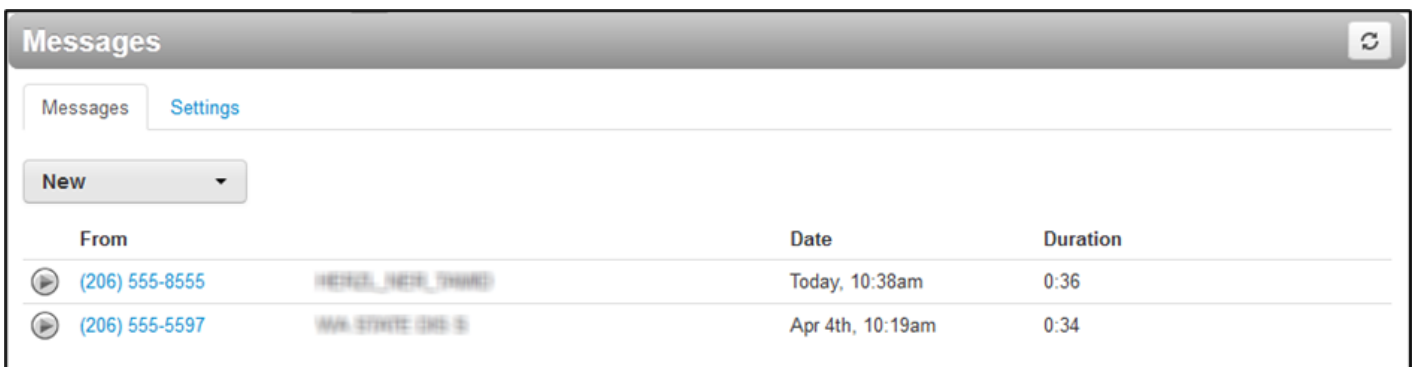

Like the Home page, you can play messages, click a number to call it back, and download, save, forward, and delete messages. To see all the controls available, hover the mouse pointer over a message.

The **New** drop-down list allows you to review New, Saved, and Trash (recently deleted) messages.



Voicemail Settings

Clicking the Settings tab displays options for controlling your voicemail order, timestamps, greetings, and voicemail to email.

Messages
Settings

Enable Voicemail

Inbox

Options

 Sort voicemail inbox by latest first
 Announce voicemail received time
 Announce incoming call ID

Operator Forward

Greetings

Voicemail Greeting

v
▶
⬇
▶

Recorded Name

⬆
▶

Unified Messaging

Email Notification


Field	Description
Enable Voicemail check box Inbox	Enables (check) or disables (uncheck) voicemail. These options affect audio voicemail (calling in) but not the portal. <ul style="list-style-type: none"> Sort Voicemail inbox by latest first = plays your newest messages first. Announce voicemail received time = plays the timestamp of the message. Announce incoming call ID = plays the caller ID number if available. Operator Forward = option to press 0 in a mailbox greeting and be directed elsewhere.
Greetings	Allows you to select an active voicemail greeting, listen to it, and record a new greeting. <ul style="list-style-type: none"> To select the active voicemail greeting, click it from the pull-down menu and click Save. To listen to a selected greeting on your PC, click the play button: To record a greeting, see “Recording a Greeting”.

Recording a Greeting

∅ To record a greeting

. From the **Settings** tab of the Messages page, click the speaker icon .

A Manage Greetings page similar to the one below appears.

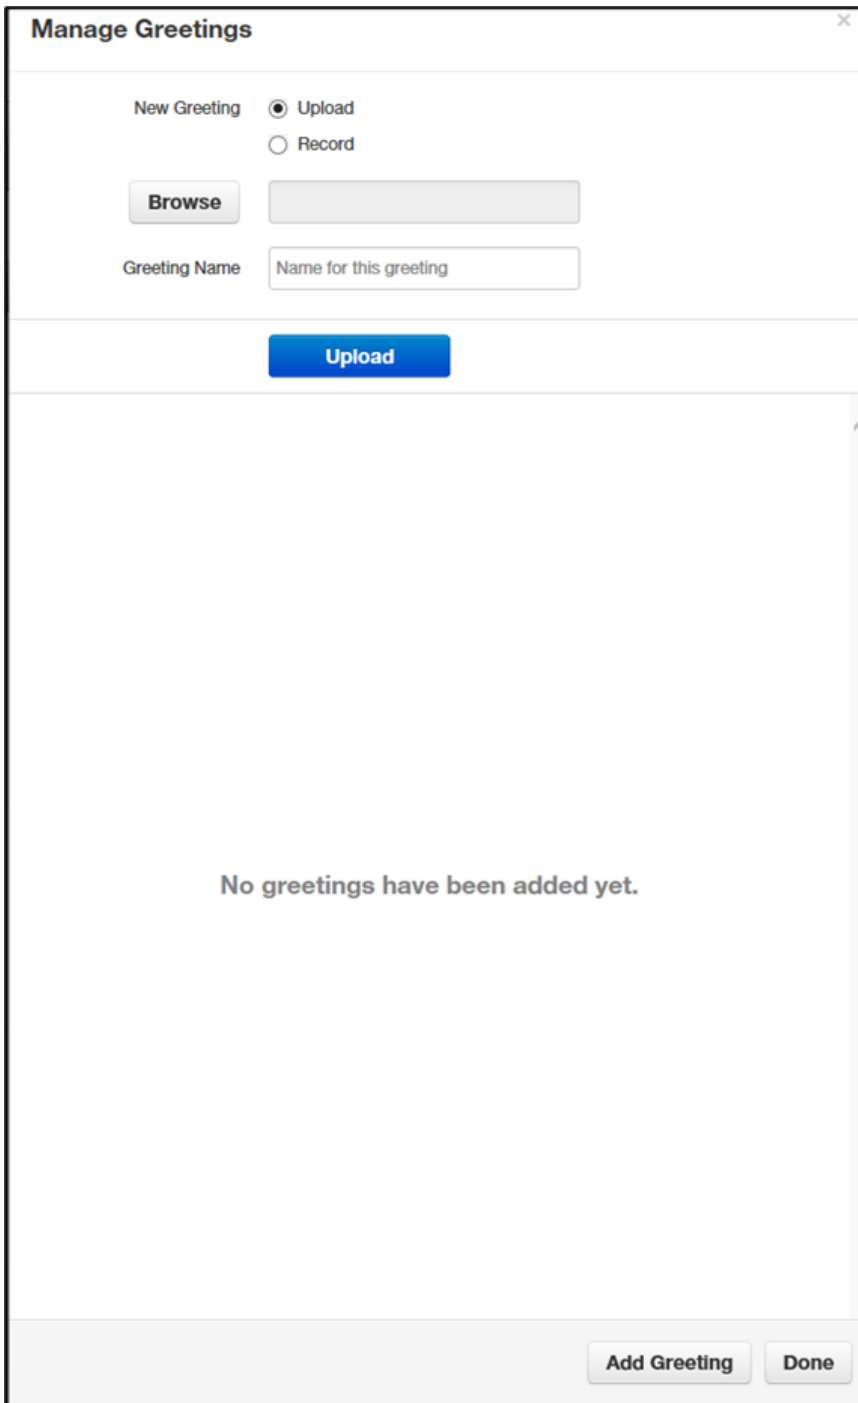

The screenshot shows a dialog box titled "Manage Greetings" with a close button (X) in the top right corner. The dialog is divided into two main sections. The top section contains the "New Greeting" options, where "Upload" is selected with a radio button, and "Record" is unselected. Below these options is a "Browse" button next to a text input field. Underneath is a "Greeting Name" label followed by a text input field containing the placeholder text "Name for this greeting". A large blue "Upload" button is centered below the input fields. The bottom section of the dialog is mostly empty, with the text "No greetings have been added yet." centered in the middle. At the bottom right of the dialog, there are two buttons: "Add Greeting" and "Done".

. Next to **New Greeting**, click **Record**.

The **Browse** button changes to a **Call me at** field.

Manage Greetings

New Greeting Upload Record

Call me at


Greeting Name

Call

3. In the **Call me** at field, enter a number to call. This can be an extension or a telephone number such as your cell phone.
4. In the **Greeting name** field, enter a name for this greeting.
5. Click the **Call** button.
6. At the prompt, record the new greeting. When you finish the greeting, press **#**.
7. Click **Add Greeting** at the bottom of the Manage Greetings page, and then click **Done** to close the page.

Uploading a Greeting

∅ To upload a greeting

1. From the **Settings** tab of the Messages page, click the speaker icon .
2. Hover over a greeting. Options appear for editing, deleting, or renaming the greeting.
3. Next to **New Greeting**, click **Upload**.
4. Click the **Browse** button.
5. In the Choose File to Upload dialog box, select a WAV or MP3 recording from your PC, and then click **Open**.
The path and file name appear in the **Browse** field.
6. Click **Upload**.
7. Click **Add Greeting** at the bottom of the Manage Greetings page, and then click **Done** to close the page

Recorded Name

If your company has a dial-by-name directory, you must record your name for the directory to be found. You can click the play button to listen to your current name recording on your PC, or click the speaker button to record or upload a new name recording.

Time Frames

Time frames allow you to control the scheduling of the system. You configure time frames using the Time Frames page. To display this page, click the Time Frames icon at the top of the page:



Time Frames

Three common time frames are:

- Open Hours (for example, M-F 9am-5pm)
- Holidays (Independence Day, Thanksgiving, New Year's, and so on)
- Closed Hours (all other times)


Time frames can be both shared (system-wide and set by the administrator) or personal to your extension. You can add a time frame to your extension by clicking the **Add Time Frame**.

Time Frames ↻		
Name	Description	Owner
Cell Forward Edit	Days and Times	5702
Closed Hours	Always	Shared
Customer Care Hours	Days and Times	Shared
Holidays	Specific Dates	Shared
Kevin Holiday	Specific Dates	5702
Open Hours	Days and Times	Shared

∅ To add time frames

- . From the Time Frames page, click **Add Time Frame**.

The Add a Timeframe page appears.

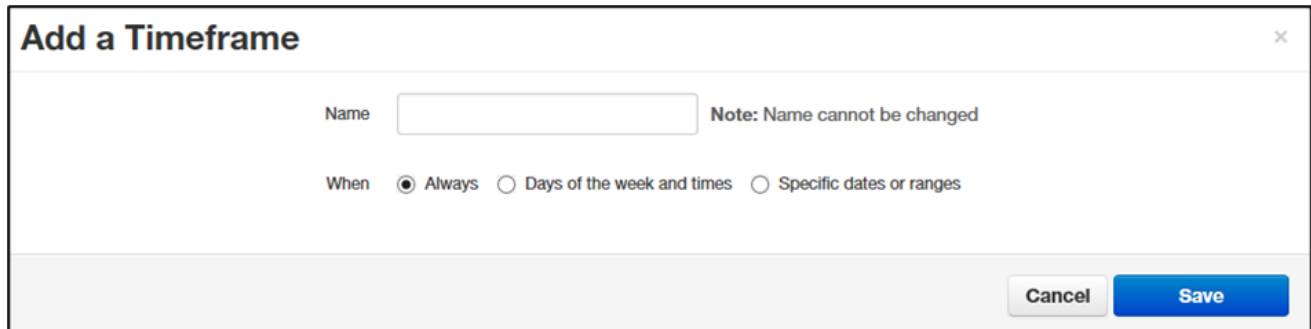

Add a Timeframe ×

Name **Note: Name cannot be changed**

When Always Days of the week and times Specific dates or ranges

- . In the **Name** field, enter a name for this time frame.
- . Next to **When**, select the time period when the time frame will be applied:
 - **Always** = select this option if the time frame will always be applied. Click **Save** to complete the procedure.
 - **Days of the week and times** = select this option to select days and times when the time frame will be applied. Proceed to “If you select Days of the week and times” on page 23.
 - **Specific dates or ranges** = select this option to specify a specific date or range of dates. Proceed to “If you select Specific dates or ranges” on page 27.

If you select Days of the week and times

Options appear for selecting days and times when the time frame will be applied.

Add a Timeframe

Name: × **Note:** Name cannot be changed

When: Always Days of the week and times Specific dates or ranges

<input type="checkbox"/> Sunday	12:00 AM	6:00 AM	12:00 PM	6:00 PM	11:59 PM	<input type="checkbox"/>
<input type="checkbox"/> Monday	12:00 AM	6:00 AM	12:00 PM	6:00 PM	11:59 PM	<input type="checkbox"/>
<input type="checkbox"/> Tuesday	12:00 AM	6:00 AM	12:00 PM	6:00 PM	11:59 PM	<input type="checkbox"/>
<input type="checkbox"/> Wednesday	12:00 AM	6:00 AM	12:00 PM	6:00 PM	11:59 PM	<input type="checkbox"/>
<input type="checkbox"/> Thursday	12:00 AM	6:00 AM	12:00 PM	6:00 PM	11:59 PM	<input type="checkbox"/>
<input type="checkbox"/> Friday	12:00 AM	6:00 AM	12:00 PM	6:00 PM	11:59 PM	<input type="checkbox"/>
<input type="checkbox"/> Saturday	12:00 AM	6:00 AM	12:00 PM	6:00 PM	11:59 PM	<input type="checkbox"/>

Using the check boxes next to the name of each day of the week, check the days when the time frame will be applied. A blue line to the right of checked day shows the default hours for this time frame (9:00 AM through 5:00 PM).

Add a Timeframe


Name: × **Note:** Name cannot be changed

When: Always Days of the week and times Specific dates or ranges

<input type="checkbox"/> Sunday	12:00 AM	6:00 AM	12:00 PM	6:00 PM	11:59 PM	<input type="checkbox"/>
<input checked="" type="checkbox"/> Monday	12:00 AM	6:00 AM	12:00 PM	6:00 PM	11:59 PM	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/> Tuesday	12:00 AM	6:00 AM	12:00 PM	6:00 PM	11:59 PM	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/> Wednesday	12:00 AM	6:00 AM	12:00 PM	6:00 PM	11:59 PM	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/> Thursday	12:00 AM	6:00 AM	12:00 PM	6:00 PM	11:59 PM	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/> Friday	12:00 AM	6:00 AM	12:00 PM	6:00 PM	11:59 PM	<input checked="" type="checkbox"/>
<input type="checkbox"/> Saturday	12:00 AM	6:00 AM	12:00 PM	6:00 PM	11:59 PM	<input type="checkbox"/>

Default operating hours


. To change the start time, drag the button on the left side of the blue bar either to the left to begin the start time earlier or to the right to begin the start time later.



. To change the end time, drag the button on the right side of the blue bar either to the left to shorten the end time or to the right to lengthen the end time.



Hint: To fine-tune start and end times, click start time or end time button, and then use the left and right arrow keys on your keyboard to change the time in 5-minute increments.

4. By default, each day is made up of one time period. However, you can use the  icon to define two time periods per day. For example, the figure below shows a setup for an office that answers calls in the morning and afternoon, and then transfers calls to an answering service over lunch, on Monday through Friday. By doing this, you would create two time frames (for example, one from 8 to noon and another from 1:00 to 5:00 PM).

Add a Timeframe

Name **Note:** Name cannot be changed

When Always Days of the week and times Specific dates or ranges

<input type="checkbox"/> Sunday		
<input checked="" type="checkbox"/> Monday		
<input checked="" type="checkbox"/> Tuesday		
<input checked="" type="checkbox"/> Wednesday		
<input checked="" type="checkbox"/> Thursday		
<input checked="" type="checkbox"/> Friday		
<input type="checkbox"/> Saturday		


. Click **Save** to save your selections.

The time frame appears as a row on the Time Frames page.



Name	Description	Owner
Normal Business Hours	Days and Times	Shared


Hint: Moving the pointer over the blue text in the **Description** column shows the settings for that timeframe.

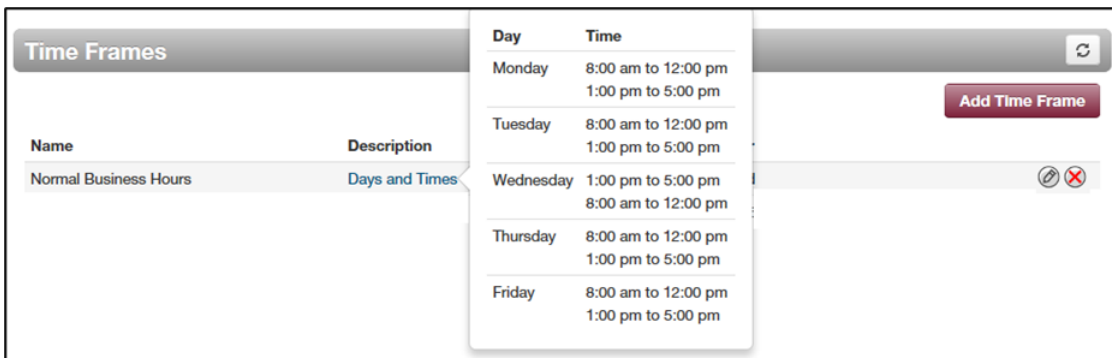

Day	Time
Monday	8:00 am to 12:00 pm 1:00 pm to 5:00 pm
Tuesday	8:00 am to 12:00 pm 1:00 pm to 5:00 pm
Wednesday	1:00 pm to 5:00 pm 8:00 am to 12:00 pm
Thursday	8:00 am to 12:00 pm 1:00 pm to 5:00 pm
Friday	8:00 am to 12:00 pm 1:00 pm to 5:00 pm

If you select Specific dates or ranges


Fields appear for entering dates or ranges

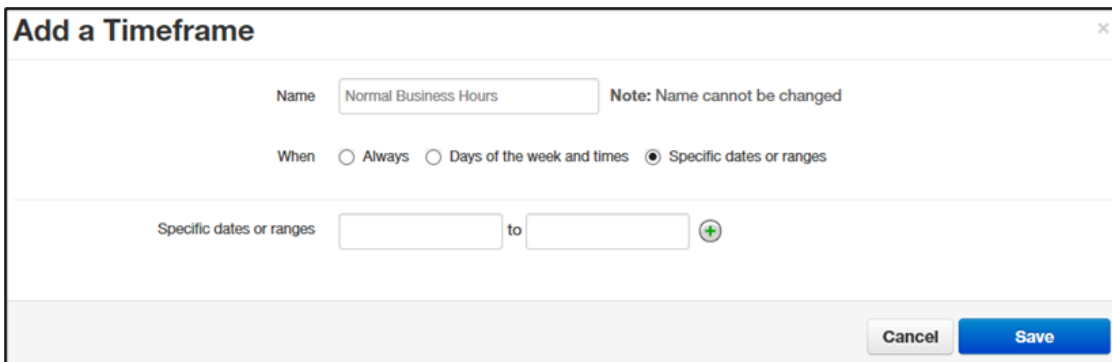

Add a Timeframe

Name: **Note:** Name cannot be changed

When: Always Days of the week and times Specific dates or ranges

Specific dates or ranges: to 

Click in the left field, and then select a starting date and time from the pop-up calendar.

- Click in the right field, and then select an ending date and time from the pop-up calendar.
- To specify additional ranges, click the icon to display another row of fields, and then repeat steps 1 and 2 in the new fields. Repeat this step for each additional date or range you want to specify. To delete a date or range, click the icon next to the appropriate row.

- Click **Save** to save your selections.

The time frame appears as a row on the Time Frames page.

Time Frames		
Name	Description	Owner
Normal Business Hours	Specific Dates	Shared

[Add Time Frame](#)

Hint: Moving the pointer over the blue text in the **Description** column shows the settings for that timeframe.

Time Frames



Add Time Frame

Name

Description

Owner

Normal Business Hours

Specific Dates

Begin

End


12/30/2015

12/30/2015



Answering Rules

After you set up your time frames, you can create different answering rules for your time frames. You configure answering rules using the Answering Rules page. To display this page, click the **Answering Rules** icon at the top of the page:



The left side of the Answering page has a **Rings for *n* seconds** drop-down list that allows you to specify the maximum ring time (one ring is generally 5 seconds). When that time expires, the caller will be forwarded to the **Call Forward When Unanswered** rule if defined; otherwise, the caller will be forwarded to voicemail if enabled. The right side of the Answering Rules page has buttons for adding answering rules, and specifying allowed and blocked numbers.

The screenshot shows a web interface for configuring answering rules. At the top, it says "Answering Rules / Kevin Selkowitz (5702)" with a refresh icon on the right. Below this, there is a "Ring for" field set to "20" seconds, and two buttons: "Allow / Block" and "Add Rule". A table lists five rules with expandable arrows on the left. The "Open Hours" rule is marked as "Active".

Time Frame	Description
Open Hours Active	Simultaneously ring x5702, x5702a, x5702c, x5702b, x5702d, x5702e
Cell Forward	Simultaneously ring x5702, (425) 555-1212, x5702c, x5702e
Kevin Holiday	Do not disturb
Closed Hours	Do not disturb
Holidays	Do not disturb

Shows examples of answering rules. In this figure:

- The extension has a rule to simultaneously ring many desk phones during Open Hours.
- **Cell Forward** rings many desk phones and a cell phone simultaneously.
- Holiday and closed hour rules go straight to voicemail.

The active rule is the topmost rule that matches the conditions in the corresponding time frame. For example, the time is around 1pm on Friday, so both **Open Hours** and **Cell Forward** rule match the time/day condition, but **Open Hours** is active because it is the topmost rule. You can change the order by using the arrows at left of each rule to drag the rules.

Sample Answering Rules

∅ To add an answering rule

1. From the Answering Rules page, click **Add Rule**.

The Add an Answering Rule page appears. From this page, you can create rules to screen callers, forward calls, and ring multiple numbers simultaneously.

Add an Answering Rule [Close]

Time Frame: Select a time frame [v] This is when your answering rule will apply

Do not disturb

Call screening

Call Forwarding

Always: Extension, number or phone

On Active: Extension, number or phone

When busy: Extension, number or phone

When unanswered: Extension, number or phone

When offline: Extension, number or phone

Simultaneous ring

Include user's extension

Ring all user's phones

Answer confirmation for offnet numbers

Extension, number or phone [0] [+]

Just ring user's extension

[Cancel] [Save]

Add an Answering Rule Page

2. Complete the fields in the Add an Answering Rule page (see Table 2-3).
3. Click **Save**

Fields in the Add an Answering Rule Page

Field	Description
Time Frame	Select the time frame when this answering rule will apply.
Do not disturb	No phone rings, goes straight to voicemail if available.
Call screening	Prompts caller to say their name, lets you screen the call before accepting.
Call Forwarding Always	Immediately forwards to the number specified. See "Call Forward Drop-down Options" below.
Call Forwarding On Active	Forward calls to the number specified when you have one or more calls active. See "Call Forward Drop-down Options" below.

Call Forwarding When Busy	Forwards calls to the number specified when your extension has used all available call paths. See “Call Forward Drop-down Options” below.
Call Forwarding When Unanswered	Forwards calls to the number specified if the call is not answered after the specified ring timeout. See “Call Forward Drop-down Options” below.
Call Forwarding When Offline	Automatically forwards if your desk phone loses communication (such as during a power outage). See “Call Forward Drop-down Options” below.
Simultaneous ring	Rings many phones at once. Check box options allow you to: <ul style="list-style-type: none"> • Include the user’s extension. • Ring all your user’s phones. • Use the option “Answer confirmation for offnet numbers” to ensure that a person — and not voicemail — answers simrings to a cell/landline by prompting the answering party to press 1 to accept the call. An icon to the right of this option allows you to specify a ring delay. <p>Note: A simring rings handsets, not users. So, for example, if 111 is listed, the simring will ring handset 111. If user 111 has a call forward set to their cell, however, the simring will not occur at the cell since simring rings handsets, not users.</p>
Just ring user’s extension	Rings just your phone.

Call Forward Drop-down Options

When entering an extension as a call forward option, a drop-down list allows you to forward the call to specific resources associated with that extension. Table 2-4 describes the options. Some options may not appear, depending on the features associated with the extension.

Call Forward Drop-down Options on the Add an Answering Rule Page

Field	Description
Handset	Bypasses the user answering rules and forwards to the handset associated with the specified user.
User	Forwards to the user at that extension and follows the user’s answering rules.
Voicemail	Forwards to voicemail at the specified extension.
Queue	Forwards to the queue associated with that user.
Autoattendant	Forwards to the auto attendant associated with that user.
Conference	Forwards to a Conference bridge

Ring Timeout


At the top of the page is the ring timeout selection. This option specifies the number of seconds that your phones will ring or forwarding rule before going to voicemail (when available).

Allowing or Blocking Callers



The Answering Rules page has an **Allow/Block** button that allows you to permit or block calls from certain numbers. Using this feature, you can block unwanted calls to your phone, as well as calls from anonymous and unwanted numbers. Allowed numbers bypass user Do Not Disturb and Call Screening rules to ring through immediately.

1. From the Answering Rules page, click **Allow/Block**.

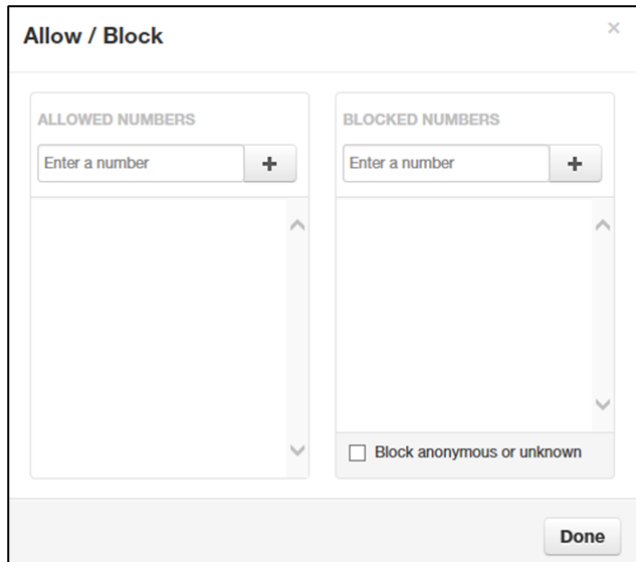The Allow/Block page appears. This page has two lists, one for allowed phone numbers (on the left) and another for blocked phone numbers (on the right).



2. To allow phone numbers, perform the following steps under **ALLOWED NUMBERS**:

- a. Click in the **Enter a number** field.
- b. Enter the number you want to allow.
- c. Click the  button. The number appears in the **ALLOWED NUMBERS** list and a brief message tells you the allowed number was added.
- d. To add more numbers, repeat step 2.
- e. To remove a number, click the  button next to that number.

Examples of
allowed numbers

Allow / Block

ALLOWED NUMBERS

Enter a number

555-1234

555-2468

BLOCKED NUMBERS


Enter a number

Block anonymous or unknown

3. To block phone numbers, perform the following steps under **BLOCKED NUMBERS**:

- a. Click in the **Enter a number** field.
- b. Enter the number you want to block.
- c. Click the button. The number appears in the **BLOCKED NUMBERS** list and a brief message tells you the blocked number was added.
- d. To add more numbers, repeat step 3.
- e. To remove a number, click the button next to that number.

4. To block anonymous calls and calls from unknown numbers, check **Block anonymous or unknown**.

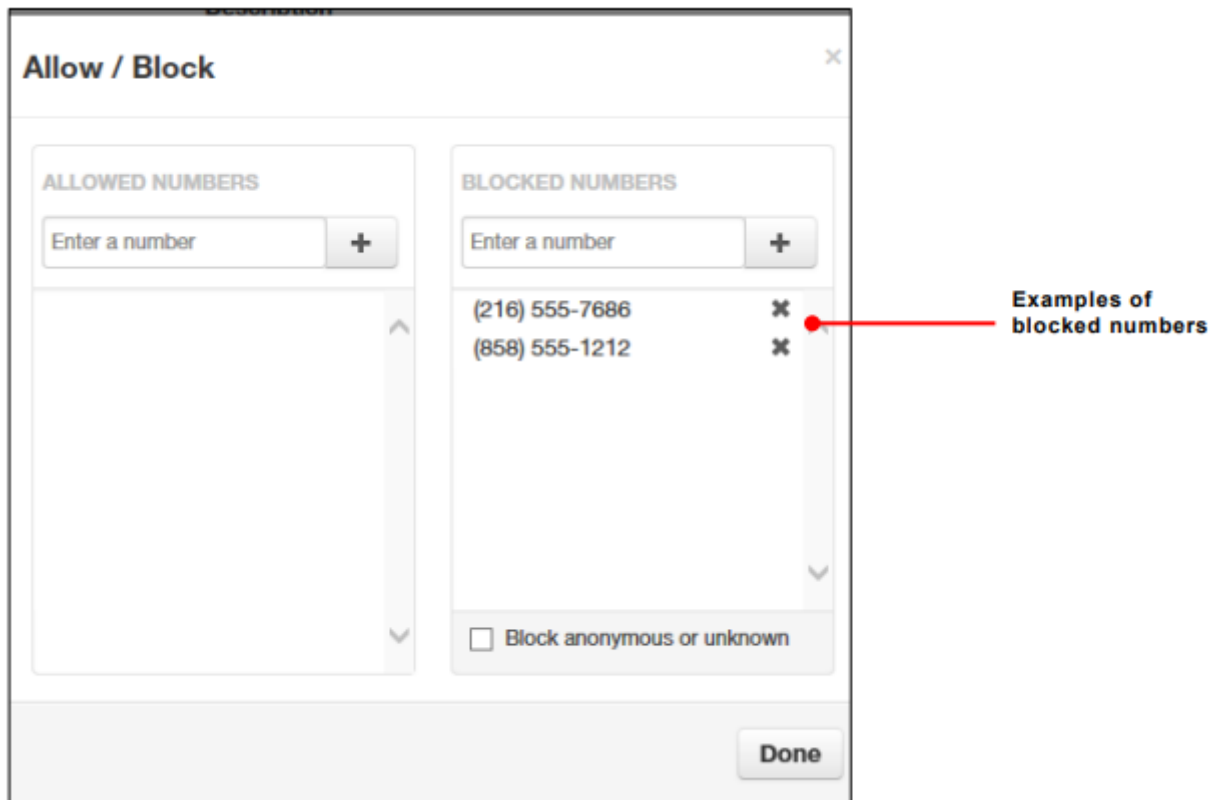

5. When you are finished, click **Done**.

Updating Phone Buttons (Speed Dials & BLF)

Introduction

This short guide helps you customize the keys for your desk phone, things like **Speed Dials** and **Busy Lamp Field (BLF)** lights, using the self-service user portal.

What you can do with this guide:

- Add or change **Speed Dial** buttons for extensions or external numbers
- Add **BLF** keys to see coworker status (idle/ringing/on a call) and optionally pick up their ringing calls
- Reorder keys and manage **sidecar/expansion modules**

Time required: About **3-5 minutes per phone** once you have the portal link and login. If your company locks button editing, you may see read-only screens, use the request template at the end and IT can apply the changes for you.

Before you start

- **What you'll need:**
 - Your **portal URL** (e.g., `https://pbx.precision-computer.com`)
 - Your **username** and **password** (*Username will generally be your [ext@companyname](#)*)
 - Your desk phone powered on and connected
- **What these do:**
 - **Speed Dial:** Press to instantly call a number or to transfer a call to that number.
 - **BLF:** A light that shows a coworker's line status (idle/ringing/on a call) and lets you pick up or speed dial them or transfer calls to them.




Tip: Button names vary slightly by brand (Poly, Yealink, Cisco, Grandstream) and by portal skin. Look for **Buttons**, **Line Keys**, **Programmable Keys**, or **Phone Settings**.

Office Managers will have different Home page then basic users, refer to [Office Manager: Updating Phone Buttons \(Speed Dials & BLF\)](#)

1. Log in and find your phone


1. **Open the portal:** Go to <https://pbx.precision-computer.com> and **Sign In**.
2. on Home page on the right side, you will see a box, "Active Phones", next to your desk phone you will have a gear icon, click on the gear icon to manage the phone layout and buttons using Button Builder.

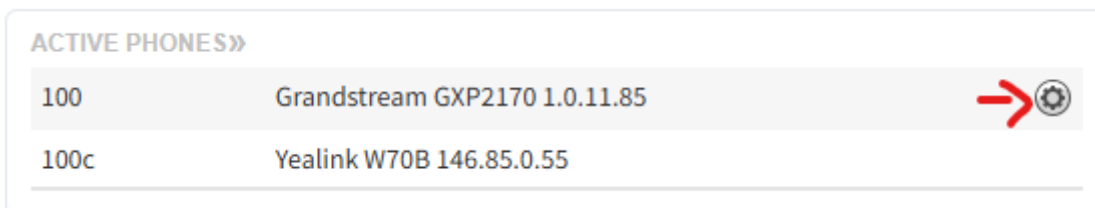

Cordless phones usually do not have layouts that can be edited and will not show the gear icon

Part B: Add a Speed Dial button

1. Click **on** an empty **Key** slot.
2. **Type** or select **Speed Dial** (sometimes called **BLF/Speed Dial** or **Favorite**).

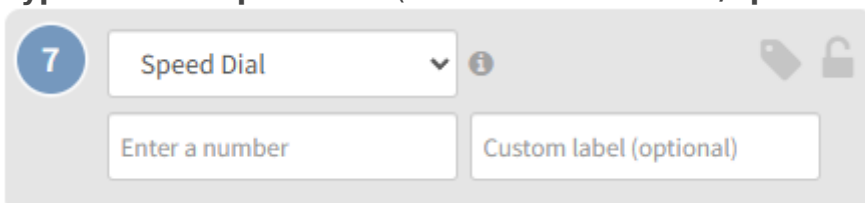

3. **Number/Value/Target:** Enter the **extension** (e.g.,) or **full phone number** (e.g.,)).
4. **Label:** Type the button name you want to see on your phone (e.g., HR, Chris, Support).
5. (Optional) **Account/Line:** If asked, leave as **Line 1** unless you use multiple lines.

6. Click **Save** (or **Apply**).

“ Quick check: If your phone screen shows pages (1/2/3), pick a **Page**, **Row**, or **Key number** if the portal asks for it.

Part C: Add a BLF (Busy Lamp Field) button

1. Click **on** an empty **Key** slot.
2. **Type/Function**: choose **BLF** or **User BLF**.
3. **Extension/Monitored User/Value**: Enter the coworker's extension (e.g., 203).
4. **Label**: (Optional) Enter the coworker's name (e.g., *Chris B*), if left blank system will use name assigned to extension.
5. Click **Save** (or **Apply**).

“ The light will show: **Green** = idle, **Blinking Red** = ringing, **Solid Red** = on a call, **Gray/off** = no status or error (exact behavior varies by phone brand).


Part D: Reorder or move buttons

- **Drag and drop** by dragging the **Key number** to place a button in a specific spot.
- If you have a **sidecar/expansion module**, be sure you are editing the correct **Module (1, 2, ...)** and **Page**.

2. Send changes to your phone

1. Click **Save/Apply** in the portal first.
2. Push the update to your phone using any one of these (depends on your portal/phone):

- **Save and Resync** button, which is visible when clicking arrow next to the Save button.



- **Reboot** the phone from the portal.
 - **Manual reboot:** Unplug power (or network if PoE), wait 5 seconds, plug back in. Or pressing reboot menu option on the phone itself.
3. Wait ~1-2 minutes for the phone to pull the new config. The new labels should appear.

Common examples

- **Speed Dial to external number:**
 - Type: Speed Dial
 - Label: Help Desk
 - Number:
- **BLF for coworker at extension 214:**
 - Type: BLF (or BLF/Speed Dial)
 - Label: Alicia
 - Extension/Monitored:

Troubleshooting

- **My new button didn't show up**
 - Make sure you clicked **Save/Apply** in the portal.
 - **Resync/Reboot** the phone.
 - Confirm you edited the **correct device/sidecar**.
- **BLF light doesn't change**
 - Verify the **extension** is correct.
 - Confirm the monitored user is in your **same domain/tenant**.
 - Ask IT to check **BLF permissions** for your user (some systems restrict who can monitor whom).
 - Reboot your phone after changes.
- **I can't edit buttons**
 - Your company may lock this feature. Ask IT to temporarily enable **self-service button editing** or to make the change for you.
- **I don't see the same menu names**

- Look for similar terms: **Buttons, Line Keys, Key Layout, Programmable Keys, or Phone Settings**. The path differs by phone brand and portal theme.
-

Quick Reference (Cheat Sheet)

- **Portal path:** *Devices/Phones → Buttons/Keys*
 - **Speed Dial:** Label + Number (ext or E.164)
 - **BLF:** Label + Extension (enable Pickup if desired)
 - **Push to phone:** Save → Resync/Reboot → Wait ~1-2 min
 - **Sidecar:** Pick Module + Page before placing keys
-

Optional: Popular phone brand notes

- **Poly/Polycom:** BLF is **Busy Lamp Field**; pickup often called **Directed Pickup**. Keys may be under **Line Key** vs **Soft Key** tabs.
 - **Yealink:** Look for **DSS Keys**; BLF is **BLF** or **BLF List**; pages 1-3 map to screen pages and sidecars.
 - **Cisco/Grandstream:** Similar wording; ensure you're placing keys on **Line Keys** (not Soft Keys) for persistent buttons.
-

Need IT to do it for you? (Template to send)

“ Please add/modify my phone buttons:

Device:

Sidecar: <yes/no & which>

1. *Key 1: BLF - Alicia (214), Pickup enabled*
 2. *Key 2: Speed Dial - Help Desk (+1 660 827 1500)*
- Please resync my phone when done. Thanks!

Send to Support@Precision-Computer.com

You're done! Your new Speed Dial/BLF keys should now appear on your phone. If something looks off, use the Troubleshooting section above or contact IT.